


**APPLICATIONS:**

- wines
- liquid smoke
- flavorings
- perfume
- sauces



**low viscosity liquid pump**

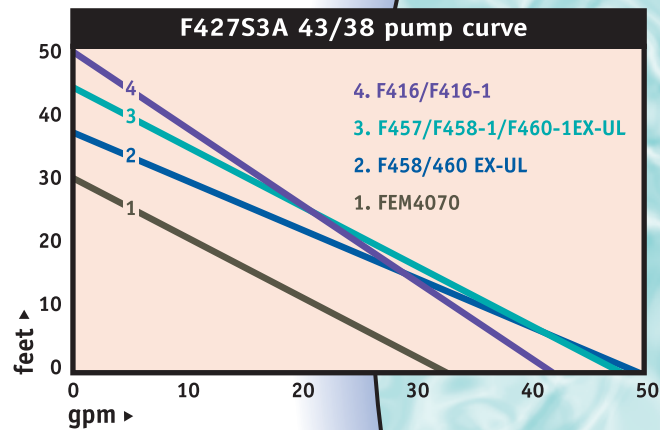

F458 120V Electric Motor and F427S3A



**FEATURES:**

- centrifugal design
- viscosities up to 1200 cp
- electric or air drive
- flow rates to 50 gpm
- complete disassembly/reassembly for cleaning under 10 minutes

PUMP F427S3A 43/38 specifics			
<b>MOTORS: ELECTRIC</b>			
FEM4070	F458	F458-1	
F460-1EX-UL	F457	F460EX-UL	
<b>AIR</b>			
F400		F416-1	F416
<b>TUBESSET CONSTRUCTION:</b>			
OUTER TUBE	316 STAINLESS STEEL		
DRIVE SHAFT	316 STAINLESS STEEL		
INNER TUBE	316 STAINLESS STEEL		
IMPELLER	ETFE		
<b>LENGTHS AVAILABLE:</b>			
	27"	39"	47"

the  
viscous  
liquid  
problem  
solvers



Flux Pumps Corporation  
300 Townpark Dr., Ste. 110  
Kennesaw, GA 30


phone: 404-691-6010  
fax: 404-691-6314  
toll free: 800-FOR-FLUX  
www.fluxpumpsusa.com






Gear Drive

Direct Drive

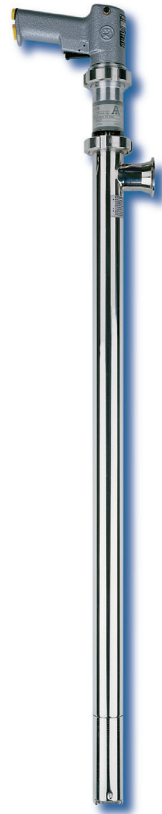

F416 Air Motor and F560GS3A

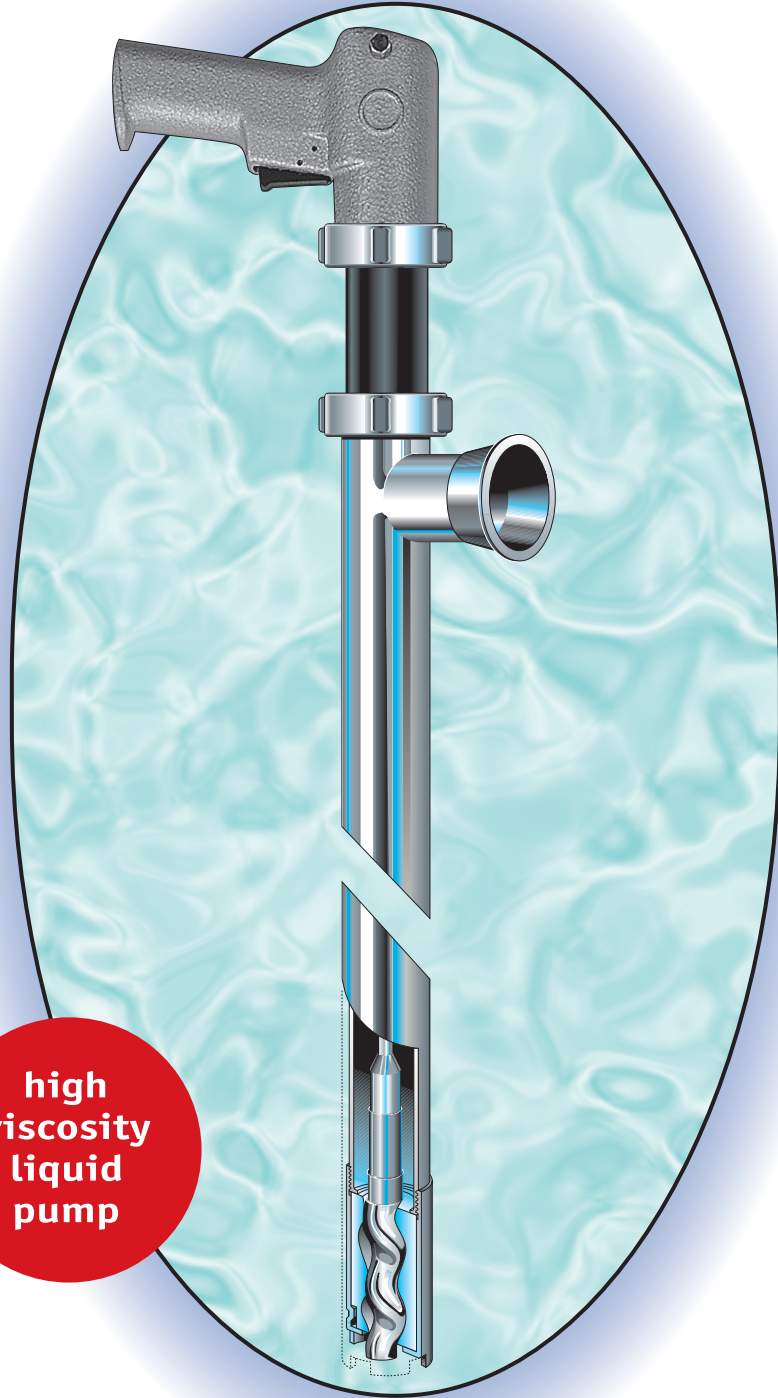


high viscosity liquid pump

FEATURES:

- positive displacement
- progressive cavity design
- flow rates to 10 gpm
- perfect for shear sensitive products
- electric or air drive
- viscosities up to 100,000 cp
- pumps soft suspended solids (3/8")
- complete disassembly/reassembly for cleaning under 10 minutes

APPLICATIONS:

- tomato paste
- honey
- corn syrup
- molasses
- mascara
- gels
- juice concentrates


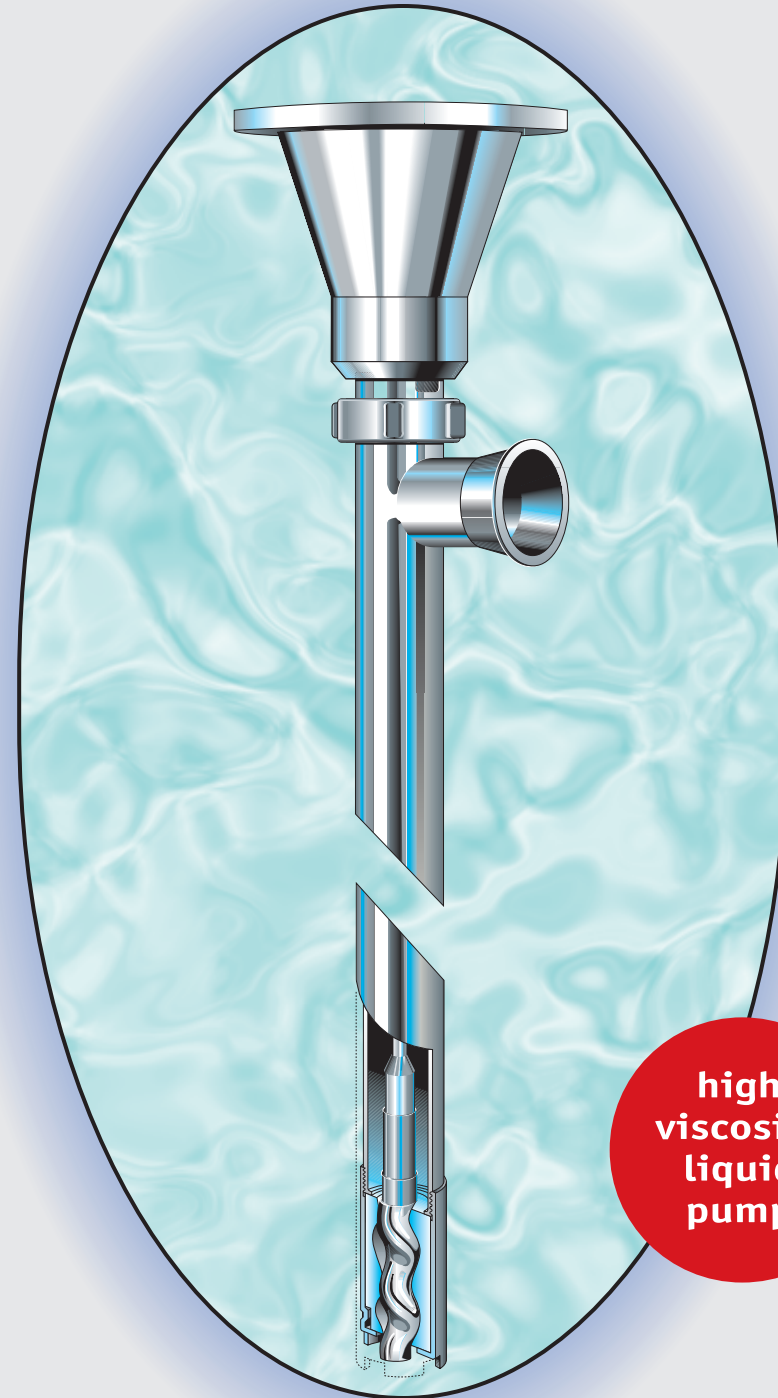


high viscosity liquid pump



G11A Air Motor and F560S3A

PUMP F560GS3A 50/21 and 54/26 specifics				
<b>MOTORS: ELECTRIC</b>				
F458	F458-1	F460-1EX-UL	F460EX-UL	F457
<b>AIR</b>				
F416	F416-1			
<b>TUBASET CONSTRUCTION:</b>				
OUTER TUBE	316 STAINLESS STEEL			
DRIVE SHAFT	316 STAINLESS STEEL			
STATOR HOUSING	316 STAINLESS STEEL			
STATOR	PTFE OR FOOD GRADE BUNA N			
MECHANICAL SEAL	316 STAINLESS STEEL/SILICON CARBIDE			
<b>LENGTHS AVAILABLE:</b> 27" 39" 47" 60"				

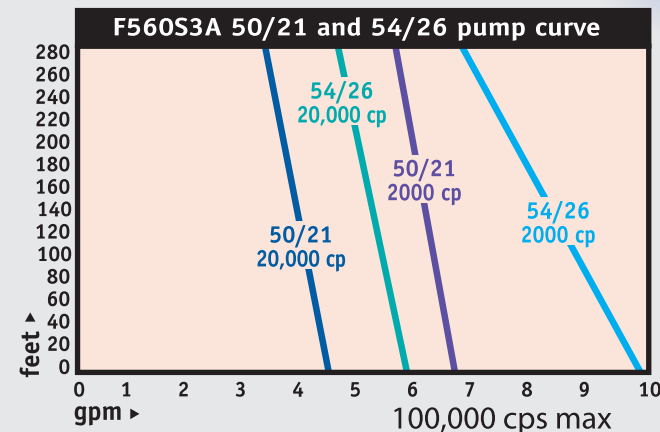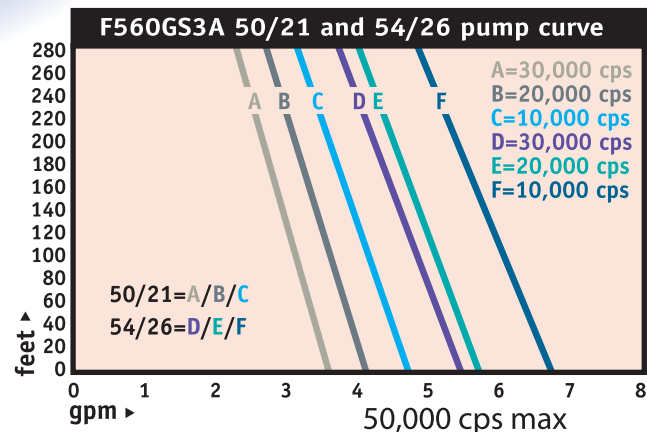

PUMP F560S3A 50/21 and 54/26 specifics		
<b>MOTORS: ELECTRIC</b>		
1.5 HP, 900 RPM, TEFC 230/460/3		
<b>AIR</b>		
1.5HP G22B	4HP G11A	5HP G28A
<b>TUBASET CONSTRUCTION:</b>		
OUTER TUBE	316 STAINLESS STEEL	
DRIVE SHAFT	316 STAINLESS STEEL	
STATOR HOUSING	316 STAINLESS STEEL	
STATOR	PTFE OR FOOD GRADE BUNA N	
MECHANICAL SEAL	316 STAINLESS STEEL/SILICON CARBIDE	
<b>LENGTHS AVAILABLE:</b> 27" 39" 47" 60"		
<b>MAXIMUM RPM:</b> 900	<b>ACCESSORIES AVAILABLE</b>	